




### DIMENSIONI • DIMENSIONS

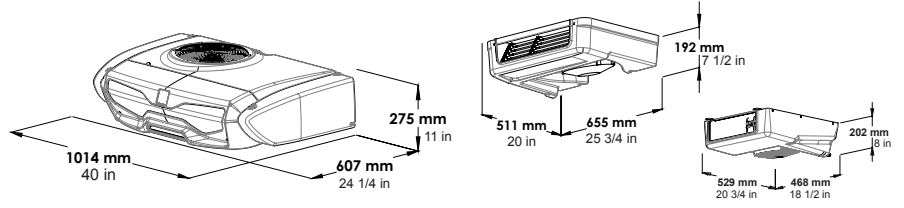

### TECHNICAL DATA

Operation	Strada • Road		Rete • Stand-by				
Refrigerant	R404A						
Gas charge	1,48 Kg - 3.25 lbs						
Cooling capacity *Ta = 30 °C			+ 4°C Evap	2.800 W - 9550 Btu/hre		+ 4°C Evap	1.800 W - 6150 Btu/hre
			- 20°C Evap	2.650 W - 9000 Btu/hre		- 20°C Evap	1.700 W - 5800 Btu/hre
			+ 4°C Evap	1.800 W - 6150 Btu/hre		+ 4°C Evap	850 W - 2900 Btu/hre
			- 20°C Evap	1.450 W - 5000 Btu/hre		- 20°C Evap	700 W - 2400 Btu/hre
Rated current consumption			12 Vdc 26 A / 0,3 kW 230/1N~/60 12 A / 2,5 kW				
Electric motor			1,1 kW - 1.5 Hp				
Defrost	Hot Gas						
Condensing unit weight			75 Kg - 165 lbs				
			45 Kg - 100 lbs				
Evaporator weight			+ 4°C Evap 9 Kg - 20 lbs + - 20°C Evap 14 Kg - 30 lbs				
Compressor			147 cc				
			87 cc				
Evap air flow		+ 4°C Evap	800 m³/h - 470 cfm				
		- 20°C Evap	1000 m³/h - 590 cfm				
Air throw		+ 4°C Evap	4 m - 13 ft				
		- 20°C Evap	3.5 m - 12 ft				

### RECOMMENDED TRUCK BODY VOLUME

Evap	+4° C Evap		-20 °C Evap	
	+30 °C	+40 °C	+30 °C	+40 °C
Vol.	20 m³ - 750 ft³	15 m³ - 540 ft³	13 m³ - 460 ft³	10 m³ - 360 ft³

### LEGEND

Tc	cold room temperature		road operation
Ta	ambient temperature		stand-by operation
Vol.	volume		

### STANDARD FEATURES

- IN-CAB CONTROLLER
- UNIT AND CONDENSATION DRAIN INSTALLATION KIT
- VEHICLE BATTERY ELECTRIC CONNECTION KIT
- REFRIGERATOR CONNECTION KIT COMPLETE WITH FITTINGS AND PIPES OF SUITABLE LENGHT
- ELECTRICAL POWER CONNECTION KIT WITH 10 MT CABLE, PLUG AND SOCKET
- SUITABLE FOR WALL OR ROOF MOUNTING
- CARTON PALLET PACKAGING
- LIQUID INJECTION

### OPTIONALS

- COMPRESSOR MOUNTING KIT
- DIFFERENT VOLTAGE ON REQUEST
- HOT WATER HEAT