



IBIZA

Innovative Spot Merchandiser. Ready to plug-in.



**SMALL FOOTPRINT
INCREASED VISIBILITY
MAXIMUM SALES PROMOTION**



MODERN TECHNOLOGY WITH BRILLIANT DESIGN.

The energy efficient IBIZA impresses with smart, up-to-date technical features.

KEY BENEFITS

- Optimal view of merchandise through condensation-preventing glass panes on all sides
- Improved ease of use due to automatic defrost and easy-to-clean plastic liner
- Durable sliding glass lids (lockable)
- Interior price labeling close to the products


OPTIONS

- Baskets and compartment separators
- Attractive LED interior lighting

MULTI-MODE CABINET (MT,LT,IC) IBIZA 100 NAM				
		Medium Temperature IAT*	Low Temperature IAT*	Ice Cream Freezer IAT*
Net Content	cu.ft	2.59	4	6.65
Total Display Area	sq.ft		6.32	
Adjustment Temperature Range	°F .. °F	From +28 to 47	From -2.2 to +8.6	From -22 to -5.8
Nominal Power Consumption Cabinet	W		350	
Nominal Current	A		6.9	
Energy Consumption kWh	kWh/24h	1.22	2.25	3.95
Refrigerant Type			R290	
Nominal voltage/frequency	V/Hz		110 – 120/60	
Physical dimensions				
Length outside/inside	inch		39.37/34.33	
Depth outside/inside	inch		33.5/28.46	
Front access height/height outside	inch		35.43/36.42	
height inside front/rear	inch		29.25	
Stacking height (is basket height for meat colling)	inch	9.84	14.17	19.69

MULTI-MODE CABINET (MT,LT,IC) IBIZA 145 NAM				
		Medium Temperature IAT*	Low Temperature IAT*	Ice Cream Freezer IAT*
Net Content	cu.ft	5.3	7.9	12.07
Total Display Area	sq.ft		9.62	
Adjustment Temperature Range	°F .. °F	From +28 to 47	From -2.2 to +8.6	From -22 to -5.8
Nominal Power Consumption Cabinet	W		400	
Nominal Current	A		7.6	
Energy Consumption kWh	kWh/24h	1.64	2.77	4.79
Refrigerant Type			R290	
Nominal Voltage/Frequency	V/Hz		110 – 120/60	
Physical dimensions				
Length outside/inside	inch		57.32/52.28	
Depth outside/inside	inch		33.5/28.46	
Front access height/height outside	inch		35.43/36.42	
Height inside front/rear	inch		29.25	
Stacking height (is basket height for meat colling)	inch	9.84	14.17	19.69

* Internal Average Temperature

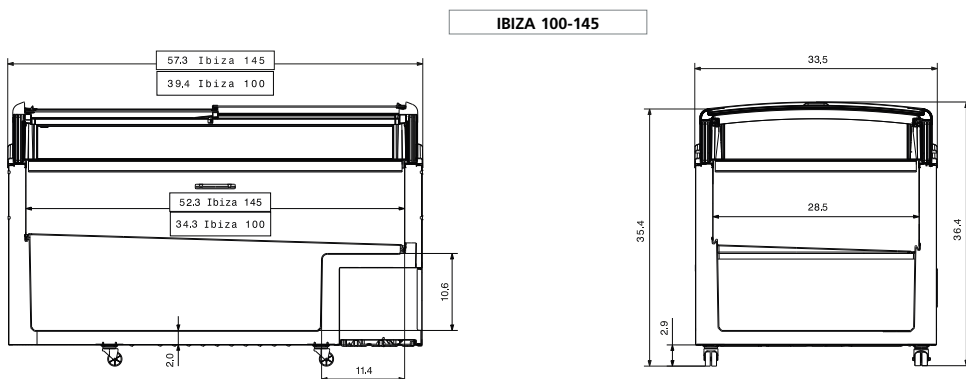

NEMA Plug Type: L5-15 P



approved according to ANSI/NSF 7
approved according to ANSI/UL 471



AHT Cooling Systems USA Inc.
7058 Weber Blvd.
Ladson SC 29456
Tel. 800-905-4768 (toll free)
or 843-767-6855
Email sales@us.ahat
www.ahatusa.net

OHSAS 18001 SA 8000	ISO 9001 ISO 14001
------------------------	-----------------------